## **Purist®**

# **KOHLER**. Faucets Single-handle bathroom sink faucet with Straight Lever handle, 1.2 gpm

#### K-14402-4A

#### **Features**

- Single Lever handle allows for both volume and temperature control
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Includes metal pop-up drain with 1-1/4" (32 mm) tailpiece
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom
- Low-flow aerator option available

#### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

#### Installation

- For single-hole installation
- Preattached flexible supply lines simplify installation

#### Recommended Products/Accessories

K-23726 Drain treatment

K-14375 24" Double Towel Bar

K-14377 Pivoting toilet paper holder

K-14435 18" Towel Bar

K-14436 24" Towel Bar

K-14441 Towel Ring

K-14443 Robe Hook

K-14444 Vertical toilet paper holder





#### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

### **KOHLER® Faucet Lifetime Limited** Warrantv

See website for detailed warranty information.

#### Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass



## **Purist®**

## KOHLER Faucets Single-handle bathroom sink faucet with Straight Lever handle, 1.2 gpm K-14402-4A

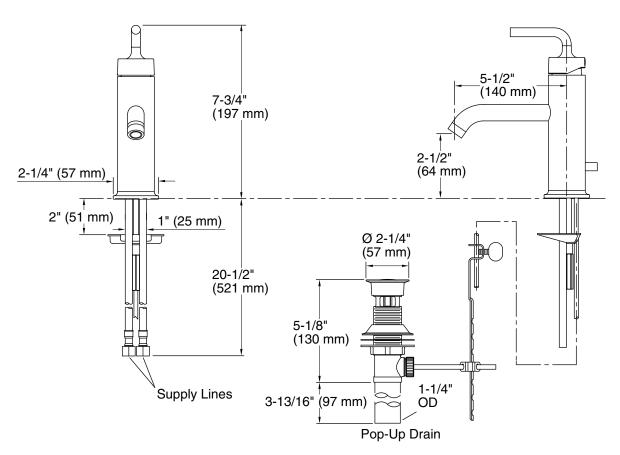

#### **Technical Information**

All product dimensions are nominal.

1.2 gal/min (4.5 l/min) Faucet flow rate:

Drain included: Yes Drain tailpiece Yes

included:

Spout:

Spout reach: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these

regulations.

