

## Features

- Digital control with easy-to-read icons and configurable touch screen
- Control temperature, flow, and up to six shower outlets from a simple, intuitive interface
- Turn the large KOHLER® dial for easy temperature and flow rate adjustment
- Nine user-definable presets let you save your favorite shower settings
- Use with the KOHLER Konnect® app to unlock additional Anthem system features, Kohler-developed experiences, and system updates
- System warm-up and pause feature
- Includes optional flow restrictor, limiting total flow to 1.75 gpm (6.6 lpm), for installations where water conservation or CEC compliance is desired
- Features multiple language options
- Connect up to two controls within your digital shower system
- Requires an Anthem digital thermostatic valve (K-28209, K-28210, K-28211 or K-28212); sold separately
- Pair with optional Anthem remote on/off button (K-28213); sold separately



## Codes/Standards

UL 1951  
CSA C22.2 No. 68

## KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

See website for detailed warranty information.

## Material

- Premium material construction for durability and reliability

## Installation

- After digital control is connected to valve and power source, follow on-screen prompts for easy setup; no Internet needed
- Wall-mount

## Required Products/Accessories

K-28209 Two-port digital thermostatic valve

or

K-28210 Three-port digital thermostatic valve

or

K-28211 Four-port digital thermostatic valve

or

K-28212 Six-port digital thermostatic valve


## Recommended Products/Accessories

K-28213 Remote on/off button for digital thermostatic valve

## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description                    |
|-------------------------------------------------------------------------------------|------|--------------------------------|
|  | SN   | Vibrant® Polished Nickel       |
|  | AF   | Vibrant® French Gold           |
|  | BN   | Vibrant® Brushed Nickel        |
|  | BV   | Vibrant® Brushed Bronze        |
|  | BL   | Matte Black                    |
|  | 2MB  | Vibrant® Brushed Moderne Brass |
|  | RGD  | Vibrant Rose Gold              |
|  | BGP  | Vibrant Brushed Graphite       |
|  | TT   | Vibrant Titanium               |

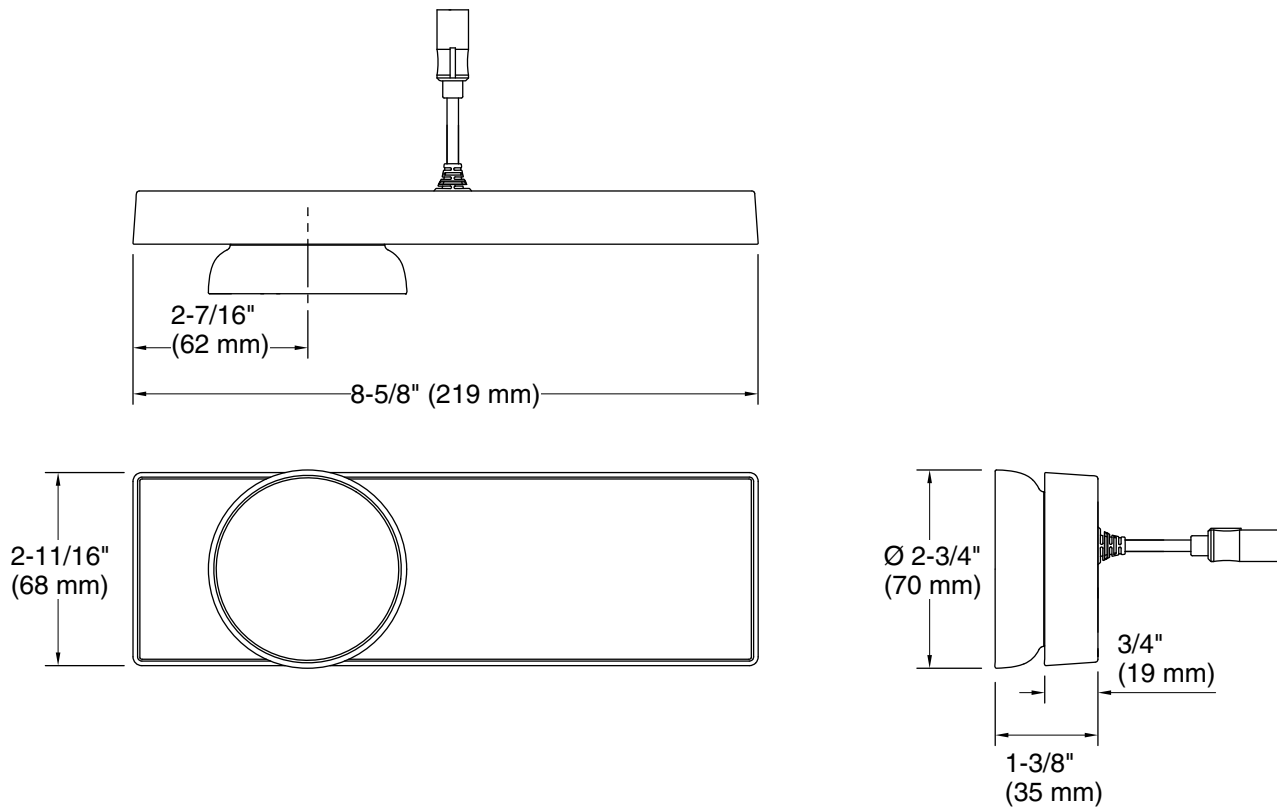

## Technical Information

All product dimensions are nominal.

### Spout:

Cable length: Data, 32 ft (9.8 m)

Max. Ambient temp: 120°F (48.9°C)

## Notes

Install this product according to the installation instructions.