

### Features

- 1/2" (12.7 mm) quarter-turn washerless ceramic disc valves
- 8.4 gpm (31.8 lpm) flow rate
- For use with 8" (200 mm) widespread, two-handle wall-mount faucets
- Requires valve trim (sold separately)

### Material

- Brass valve bodies

### Installation

- Wall-mount
- For 8" (203 mm) centers

### Optional Products/Accessories

56374 Elongated Escutcheons  
56373 Deep Rough-in Kit




### Codes/Standards

ASME A112.18.1/CSA B125.1

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

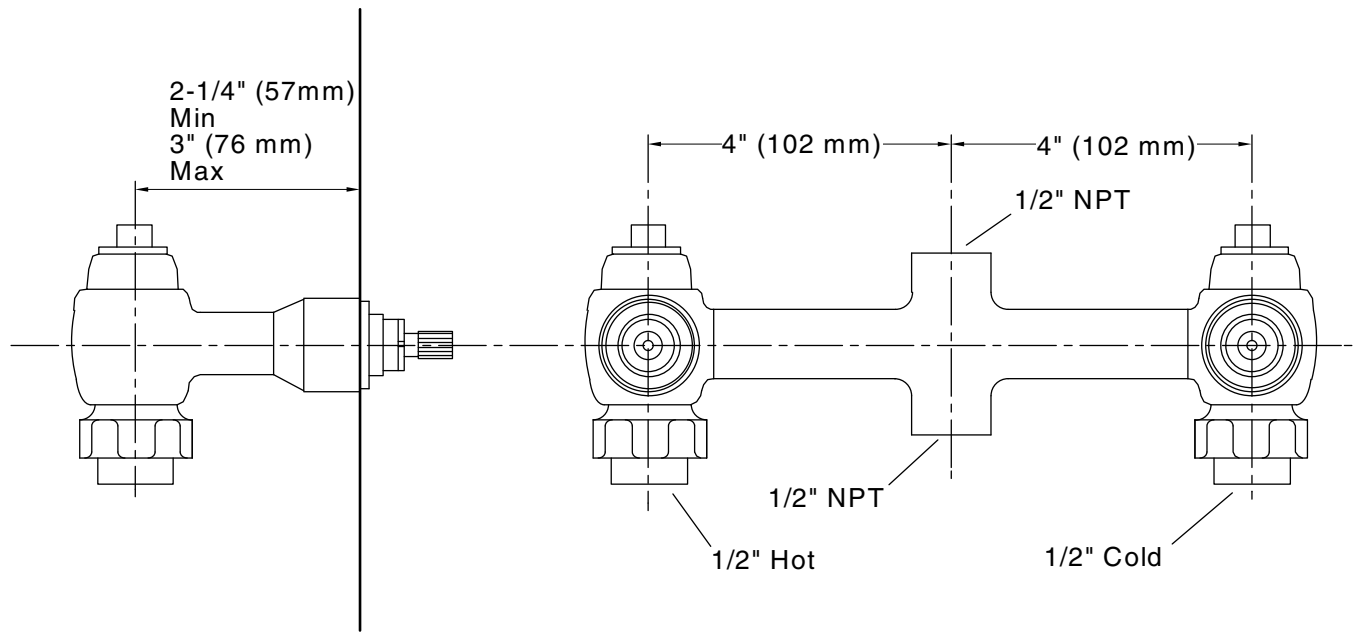

### Technical Information

All product dimensions are nominal.

#### Spout:

#### Shower Valve:

|                                    |                         |
|------------------------------------|-------------------------|
| Flow Rate (Max) @ 45 psi           | 12 gal/min (45.4 l/min) |
| Manufacturer's minimum rated flow: | 11 gal/min (41.6 l/min) |
| Pressure:                          | 45 psi (3.1 bar)        |
| Maximum (Static) Pressure:         | 125 psi (8.6 bar)       |
| Minimum (Operating) Pressure:      | 20 psi (1.4 bar)        |