# Awaken® G110

Four-function handshower, 1.75 gpm **K-72415-G** 

#### **Features**

Handshower features contemporary design

**KOHLER** Faucets

- Three spray functions and ADA-compliant nonpositive shutoff
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Thumb tab allows for a smooth transition between sprays
- Spray nozzles cover full area of sprayhead
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) flow rate.
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System
- Pause feature temporarily pauses water flow to conserve water while you lather, shave, or shampoo

#### Material

KOHLER finishes resist corrosion and tarnishing

## Installation

- Bracket or slidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

#### **Required Products/Accessories**

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose

or

K-45981 72" ribbon hose

or

K-45982 60" ribbon hose





**CSA B651** 

ОВС



#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

**NOM Standards** 

NOM 008-CONAGUA

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	VHR	





## Awaken® G110

Four-function handshower, 1.75 gpm **K-72415-G** 

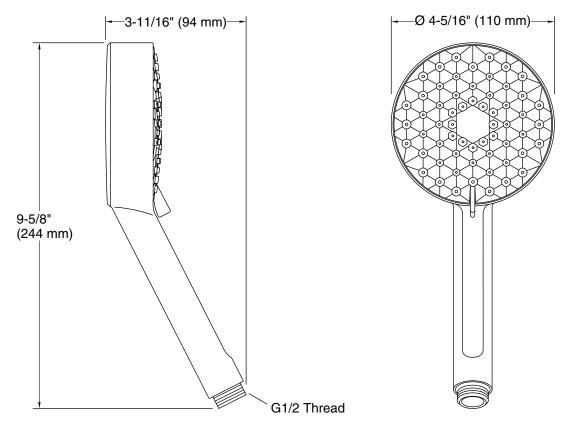

#### **Technical Information**

All product dimensions are nominal.

#### Spout:

Handshower rated max flow:

1.75 gal/min (6.6 l/min)

## **Notes**

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

