# **Components®**

# **KOHLER** Faucets Bathroom sink faucet spout with Tube design, 1.2 gpm K-77965

#### **Features**

- Tall height is ideal for vessel-style sinks
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Laminar flow
- Includes metal touch-activated drain with 1-1/4" tailpiece
- Coordinate with your choice of Components bathroom sink faucet handles for a personalized design
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

#### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

#### Installation

Widespread or remote valve

# **Required Products/Accessories**

K-77974-4 Lever bathroom sink faucet handles

or

K-77974-8 Oyl bathroom sink faucet handles

K-77974-9 Industrial bathroom sink faucet handles

or

K-77963-8A Rocker bathroom sink faucet handle

### **Recommended Products/Accessories**

K-23726 Drain treatment

K-78372 18" Towel Bar

K-78373 24" Towel Bar

K-78375 24" Double Towel Bar

K-78377 Hand Towel Arm

K-78378 Robe Hook

K-78379 Double Towel Arm

K-78382 Pivoting toilet paper holder

K-78383 Vertical toilet paper holder

K-78384 Covered double toilet paper holder





# Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# **KOHLER® Faucet Lifetime Limited** Warrantv

See website for detailed warranty information.


### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2MB	Vibrant® Brushed Moderne
_		Brass
	TT	Vibrant Titanium



# KOHLER Faucets Bathroom sink faucet spout with Tube design, 1.2 gpm K-77965

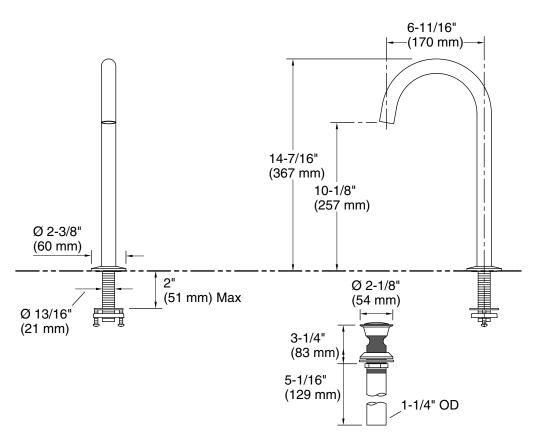

## **Technical Information**

All product dimensions are nominal.

1.2 gal/min (4.5 l/min) Faucet flow rate:

Drain included: Yes Drain tailpiece Yes

included:

Spout:

Spout reach: 6-11/16" (170 mm)

### **Notes**

Install this product according to the installation instructions.

