

### Features

- A single handle controls both on/off activation and temperature setting
- 7.5 gpm (28.4 lpm) maximum bath faucet flow rate at 45 psi (3.1 bar)
- 1.75 gpm (6.6 lpm) maximum handshower flow rate at 80 psi (5.5 bar)
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with other products in the Tone collection

### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

### Installation

- Floor-mount

### Required Products/Accessories

For freestanding installation  
K-97339 Mounting block for select floor-mount bath fillers

### Recommended Products/Accessories

K-27425 18" towel bar  
K-27426 24" towel bar  
K-27427 Robe hook  
K-27428 Towel ring  
K-27429 Pivoting toilet paper holder

### Optional Products/Accessories

K-97703 Mounting block pan for floor-mount bath filler



### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description                    |
|-------------------------------------------------------------------------------------|------|--------------------------------|
|  | CP   | Polished Chrome                |
|  | BN   | Vibrant® Brushed Nickel        |
|  | BL   | Matte Black                    |
|  | 2MB  | Vibrant® Brushed Moderne Brass |
|  | BMB  | Matte Black with Moderne Brass |

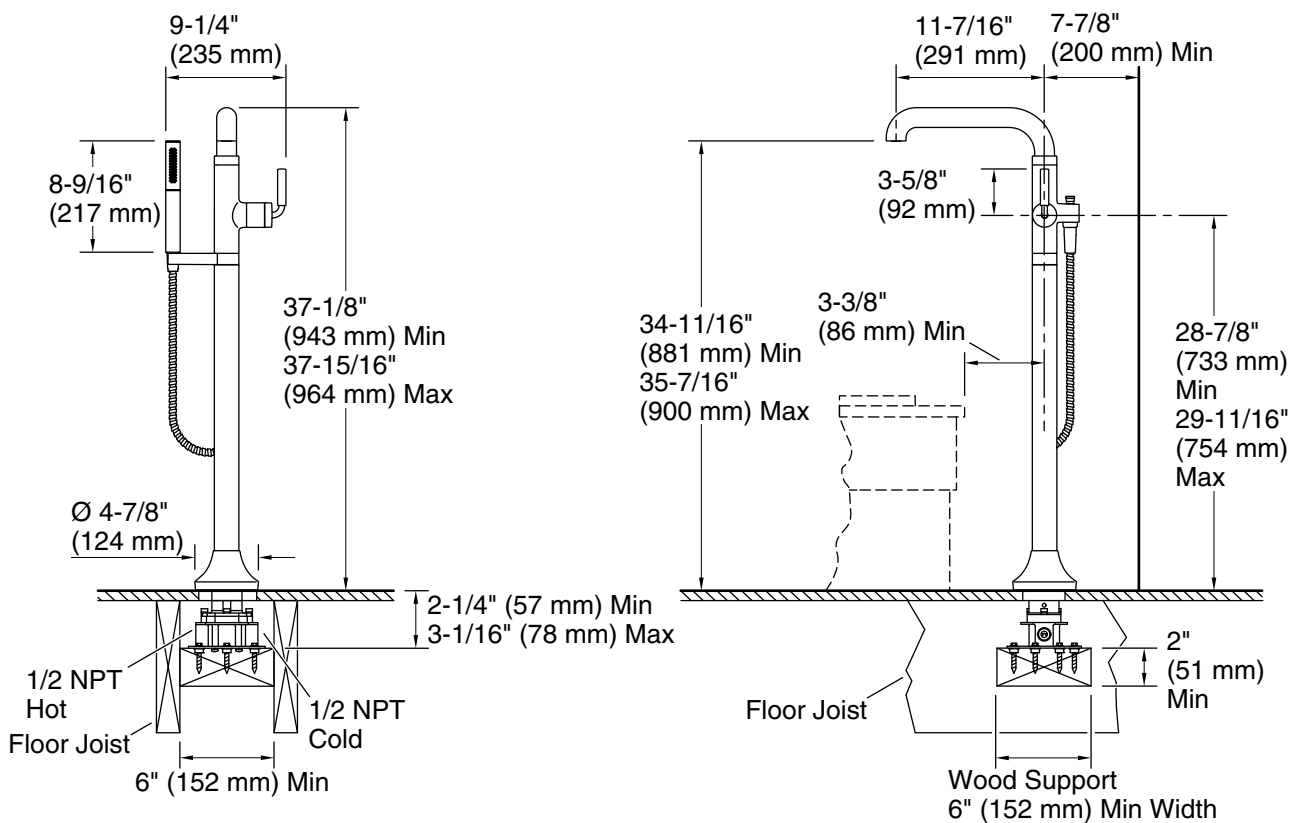

## Technical Information

All product dimensions are nominal.

Faucet flow rate: 7.5 gal/min (28.4 l/min)

### Spout:

Spout reach: 11-7/16" (291 mm)

Handshower rated max flow: 1.75 gal/min (6.6 l/min)

## Notes

Install this product according to the installation instructions.