## **KOHLER**, Faucets

### Castia™ by Studio McGee

Floor-mount bath filler trim with handshower

K-T35924-4

#### **Features**

- Designed in collaboration with Studio McGee
- A single handle controls both on/off activation and temperature setting
- 11.0 gpm (41.6 lpm) maximum bath faucet flow rate at 45 psi (3.1 bar)
- 1.75 gpm (6.6 lpm) maximum handshower flow rate at 80 psi (5.5 bar)
- Includes multifunction handshower and hose
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with other products in the Castia collection
- Requires mounting block (sold separately)

#### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

#### Installation

Floor-mount

#### **Required Products/Accessories**

For freestanding installation

K-97339 Mounting block for select floor-mount bath fillers

#### **Recommended Products/Accessories**

K-35925 18" towel bar

K-35926 24" towel bar

K-35927 Double robe hook

K-35928 Towel ring

K-35929 Toilet paper holder

#### **Optional Products/Accessories**

K-97703 Mounting block pan for floor-mount bath filler





#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) NOM Standards NOM 008-CONAGUA

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass





## Castia™ by Studio McGee

Floor-mount bath filler trim with handshower K-T35924-4

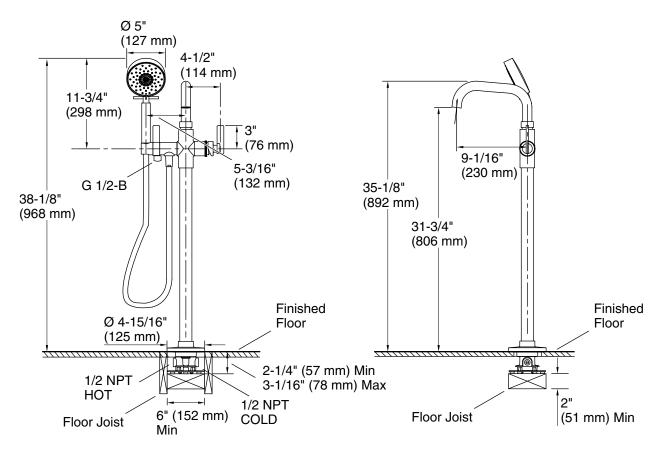

#### **Technical Information**

All product dimensions are nominal.

Faucet flow rate: 11 gal/min (41.6 l/min)

Spout:

Spout reach: 9-1/16" (230 mm)

Handshower rated max flow: 1.75 gal/min (6.6 l/min)

#### **Notes**

Install this product according to the installation instructions.

