Components®



KOHLER Faucets Wall-mount bathroom sink faucet Lever handle trim K-T77981-4

Features

- Two Lever handles offer separate control of hot and cold
- Coordinates with Components faucets, accessories, and showering components to complete your bathroom
- Dual-control wall-mounted
- Two-handle bathroom faucet trim for wall-mount installations

Premium metal construction for durability and reliability

Installation

- Wall-mount
- Requires rough-in kit (sold separately)
- Two-handle bathroom faucet trim, requires K-410-K ceramic valve to complete installation



K-410-K Wall-mount Valve

K-T23888 Wall-mount bathroom sink faucet spout with Ribbon design, 1.2 gpm

or

K-410-K Wall-mount Valve

K-T23889 Wall-mount bathroom sink faucet spout with Row design, 1.2 gpm

or

K-410-K Wall-mount Valve

K-T23890 Wall-mount bathroom sink faucet spout with Tube design, 1.2 gpm

Adapters, Rough-in and Extension Kits

1349542 Range: 2-1/2" (64 mm) -3-1/2" (89 mm)

Recommended Products/Accessories

K-23726 Drain treatment

K-78372 18" Towel Bar

K-78373 24" Towel Bar

K-78375 24" Double Towel Bar

K-78377 Hand Towel Arm

K-78378 Robe Hook

K-78379 Double Towel Arm

K-78382 Pivoting toilet paper holder

K-78383 Vertical toilet paper holder

K-78384 Covered double toilet paper holder



CSA B651 ADA OBC

Codes/Standards

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	BGP	Vibrant Brushed Graphite
	TT	Vibrant Titanium






Components®

Wall-mount bathroom sink faucet Lever handle trim
K-T77981-4

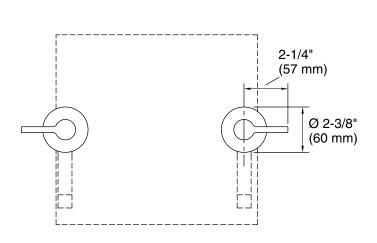



Technical Information

All product dimensions are nominal.

Spout:

Notes

Install this product according to the installation instructions.

ADA compliant for handles only.
ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

