## **KOHLER**, Faucets

# Rite-Temp® bath and shower trim kit, 1.75 gpm K-TS27421-4G

#### **Features**

- A single handle controls both on/off activation and temperature setting
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- Includes faceplate with ADA-compliant metal lever handle
- Includes 6-9/16" (167 mm) diverter bath spout with slip-fit connection
- Includes single-function 1.75 gpm (6.6 lpm) showerhead
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Includes shower arm and flange
- Coordinates with other products in the Tone collection
- Requires Rite-Temp® pressure-balancing valve (sold separately)
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

#### Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing

### **Required Products/Accessories**

K-8304 Series Rite-Temp® Valve & Cartridge Kits or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

### Adapters, Rough-in and Extension Kits

10350 Range: 3-1/2" (89 mm) - 4-1/4" (108 mm)

#### **Optional Products/Accessories**

K-10350 Deep rough-in kit K-10351 Test cap for K-8300 Series valve bodies









#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) NOM Standards NOM 008-CONAGUA

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	ВМВ	Matte Black with Moderne Brass



## **KOHLER**, Faucets

# Rite-Temp® bath and shower trim kit, 1.75 gpm K-TS27421-4G

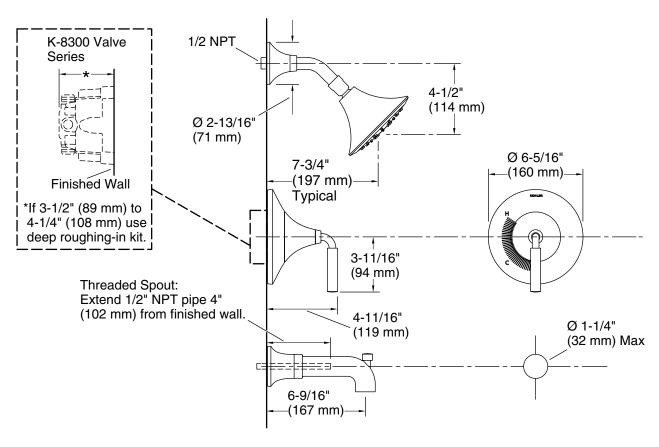

### **Technical Information**

All product dimensions are nominal.

Spout:

Spout reach: 6-9/16" (166 mm)

Shower/Rainhead rated max flow: 1.75 gal/min (6.6 l/min)

#### **Notes**

Install this product according to the installation instructions.

